





NP-Complete Problems

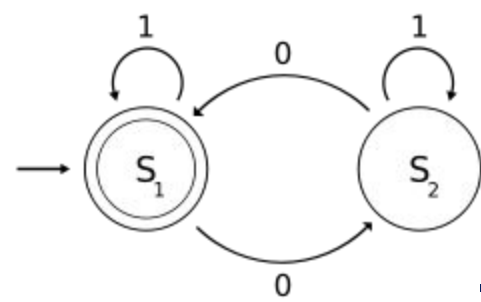


Today's adventures

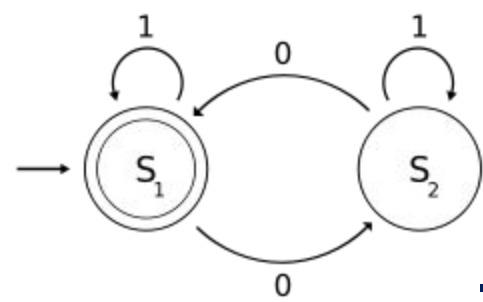


- Reduce 3SAT to Hampath
- Reduce 3SAT to Subset-Sum
- More NP-Complete examples


Weekly tip: Strive for excellence, not perfection

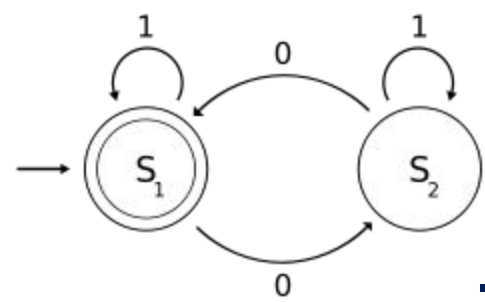


More NP-Complete Problems


Theorem. HAMILTONIAN PATH is NP-complete.

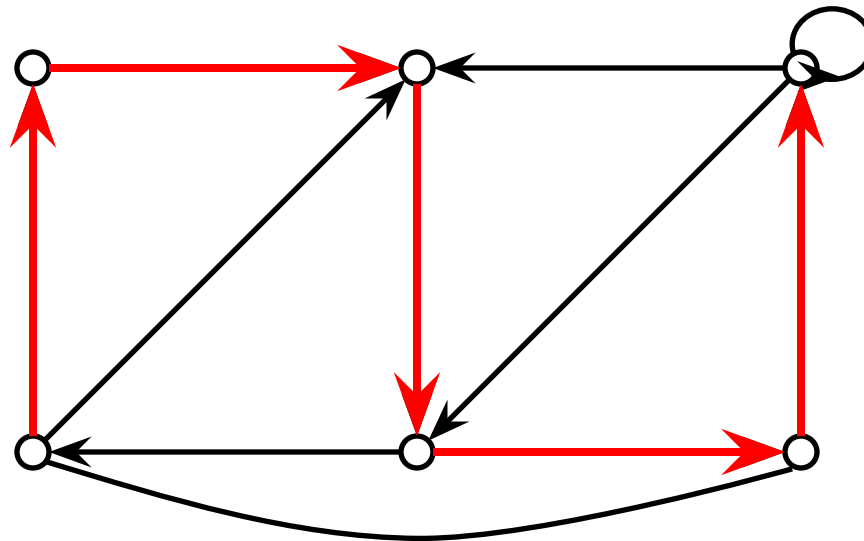

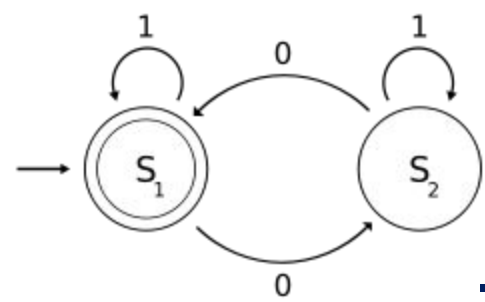

We Reduce *3SAT* to *HAMPATH*

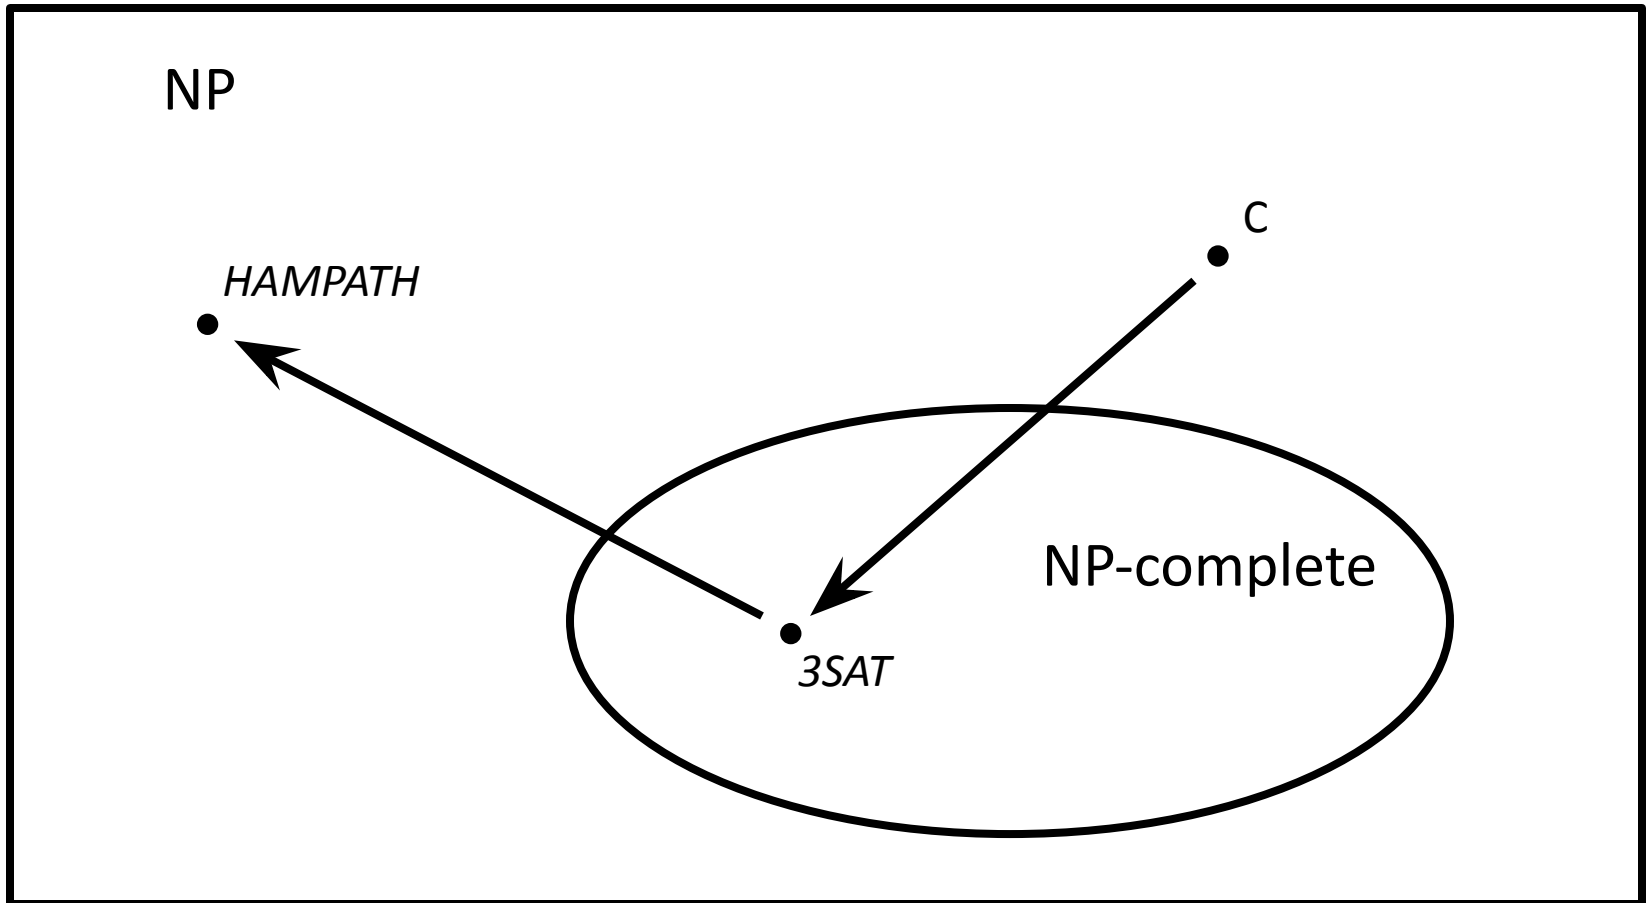

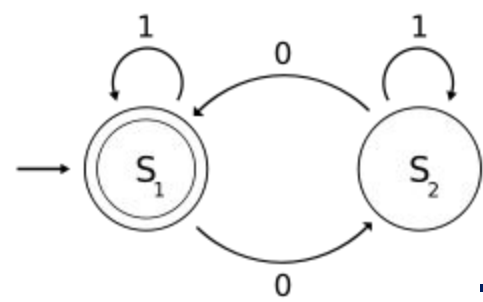


More Precisely,

Proof Outline.

Given an instance of 3SAT,

$$\varphi = (x_1 \vee x_2 \vee \neg x_3) \wedge (\neg x_1 \vee x_3 \vee \neg x_4) \wedge (x_2 \vee \neg x_4 \vee x_5)$$

we construct a directed graph G so that φ is satisfiable iff G has a Hamiltonian path.

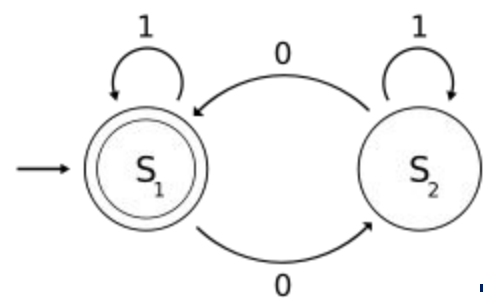


3SAT's Salient Features*

Choice. Each variable has a choice between two truth values.

Consistency . Different occurrences of the same variable have the same value.

Constraints. Variable occurrences are organized into *clauses* that provide constraints that must be satisfied.

* We model each of these three features by a different “gadget” in the graph G .

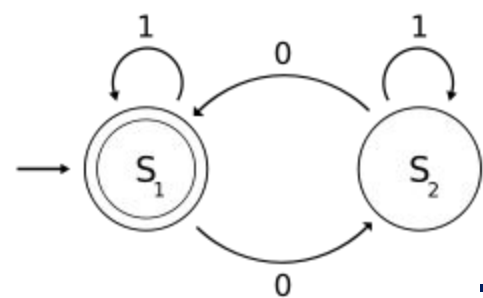


3SAT's Salient Features*

Choice. Each variable has a choice between two truth values.


Consistency . Different occurrences of the same variable have the same value.

Constraints. Variable occurrences are organized into *clauses* that provide constraints that must be satisfied.


* We model each of these three features by a different “gadget” in the graph G .

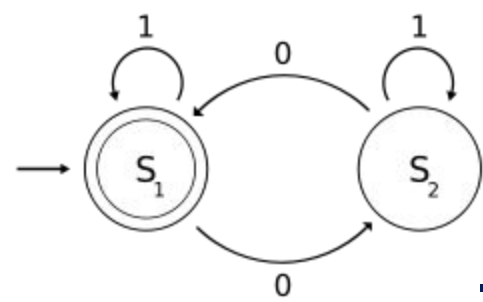


Modeling Variable x_i^*

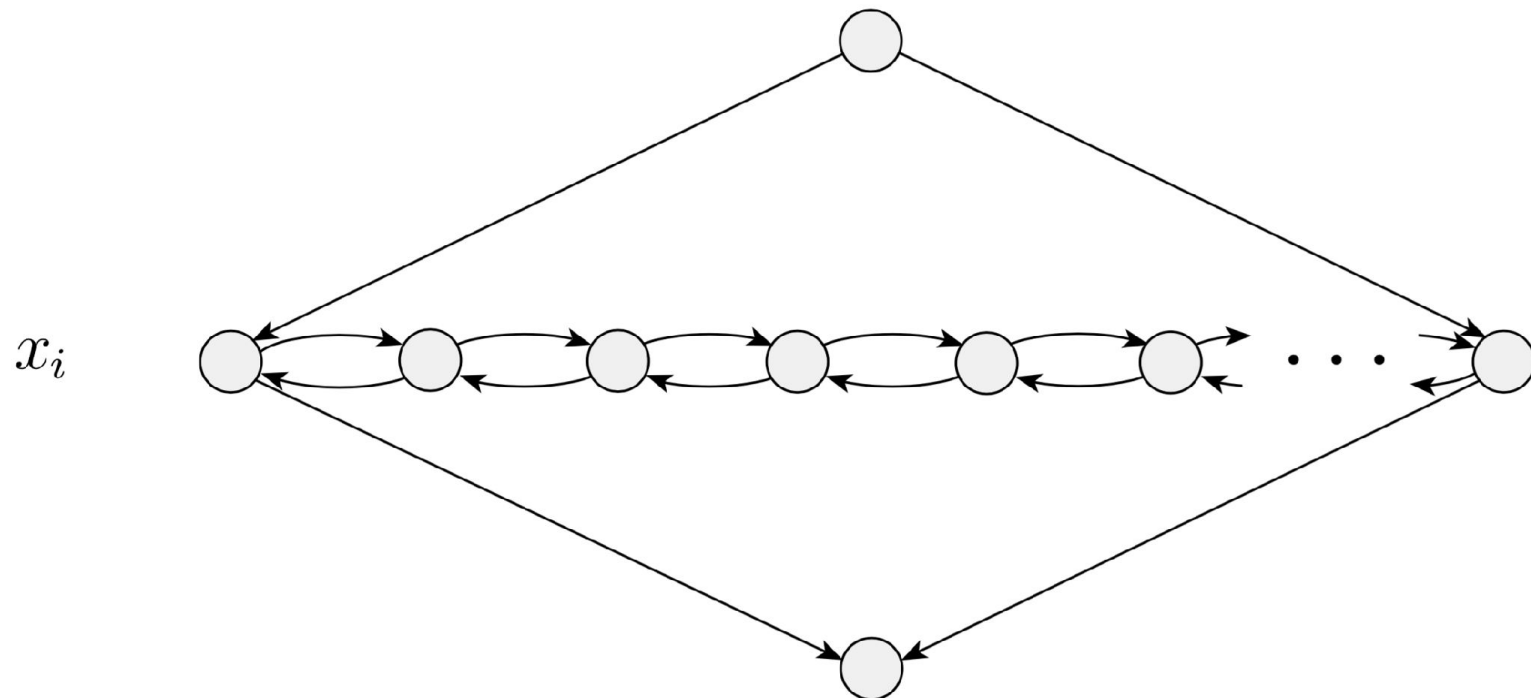


* The choice gadget.

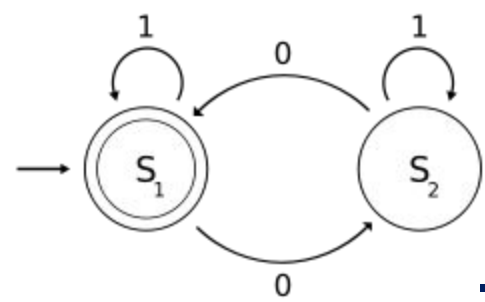

The Consistency Gadget

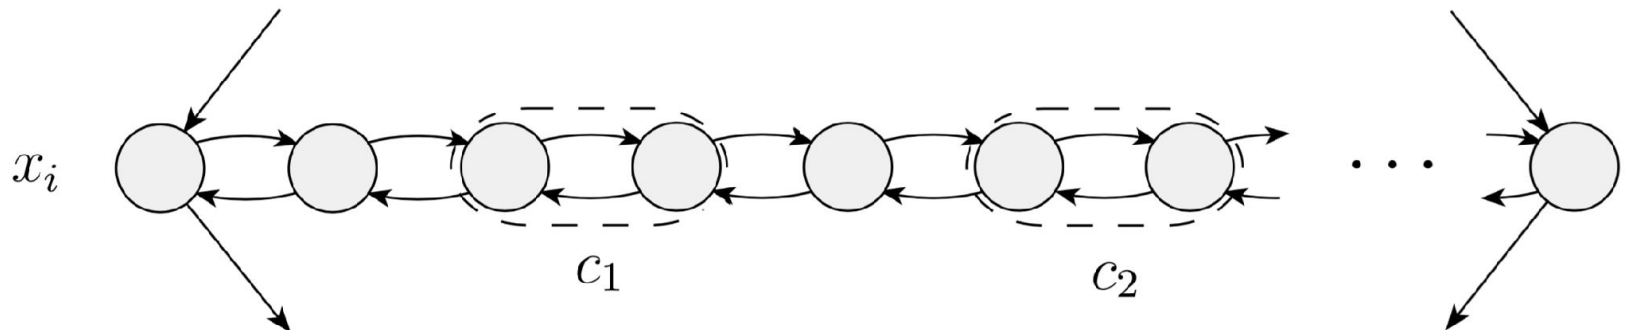

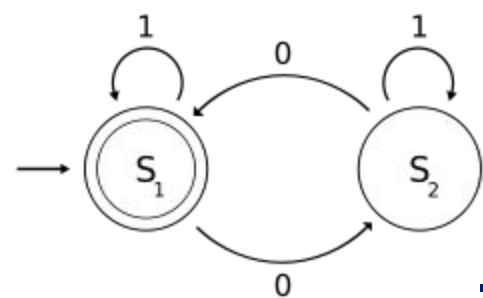


3SAT's Salient Features*

Choice. Each variable has a choice between two truth values.


Consistency . Different occurrences of the same variable have the same value.

Constraints. Variable occurrences are organized into *clauses* that provide constraints that must be satisfied.


* We model each of these three features by a different “gadget” in the graph G .

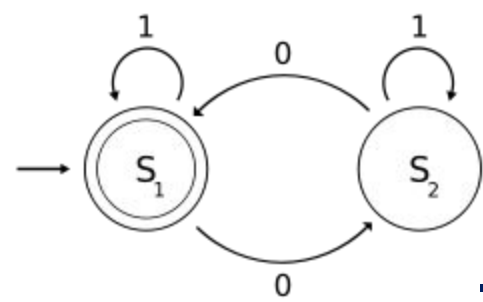

Zig-zagging and Zag-zigging

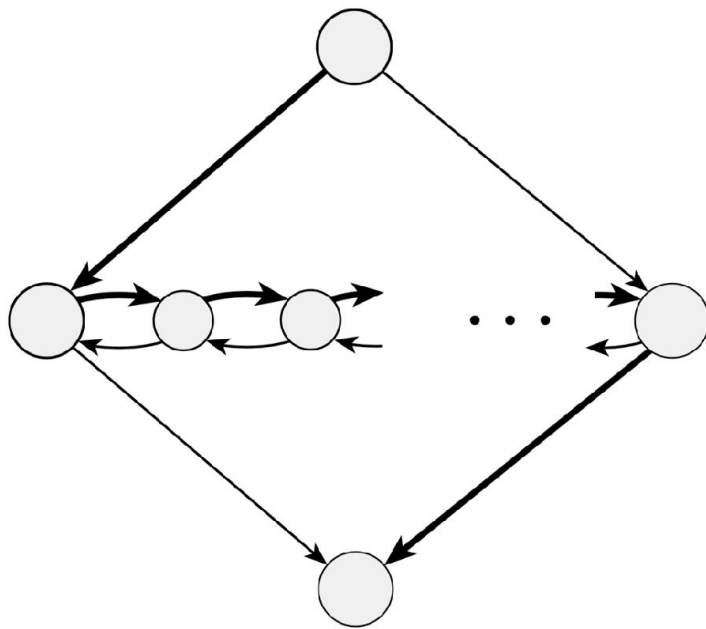


zig-zag

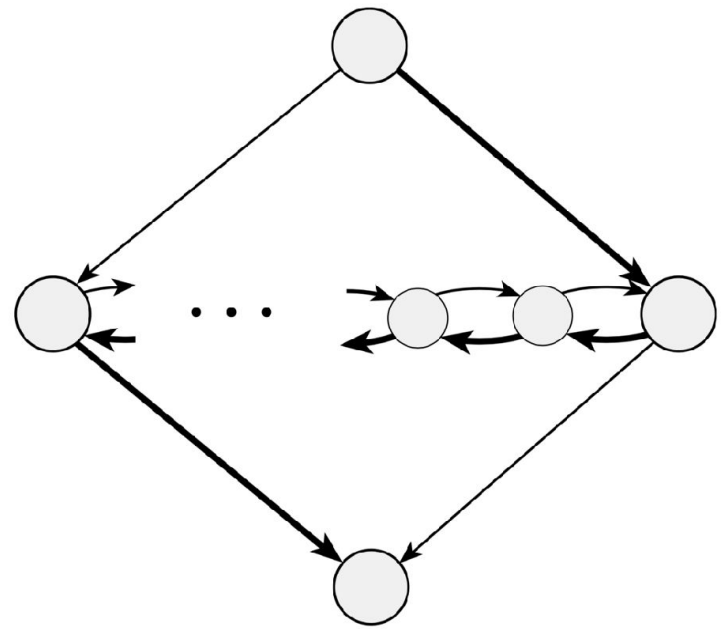

zag-zig

* The consistency gadget in action.

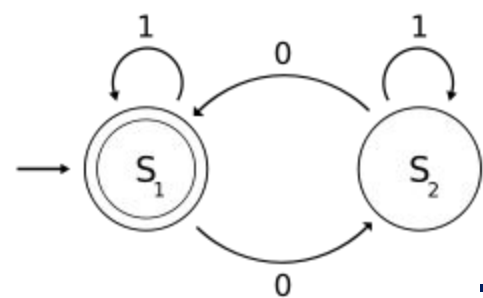


3SAT's Salient Features*

Choice. Each variable has a choice between two truth values.


Consistency . Different occurrences of the same variable have the same value.

Constraints. Variable occurrences are organized into *clauses* that provide constraints that must be satisfied.


* We model each of these three features by a different “gadget” in the graph G .

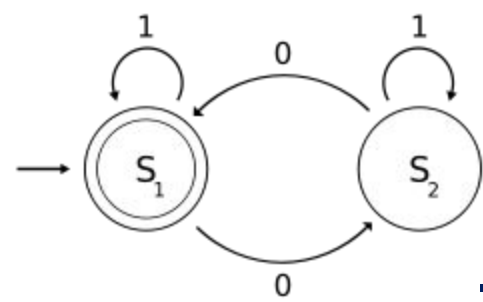


Modeling Clause c_j




c_j

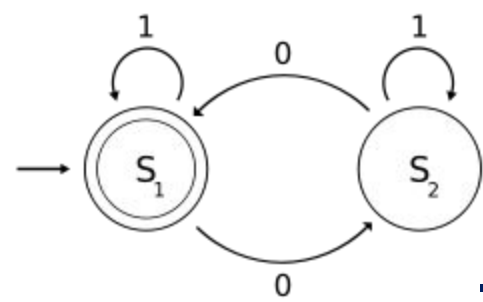



The Big Picture

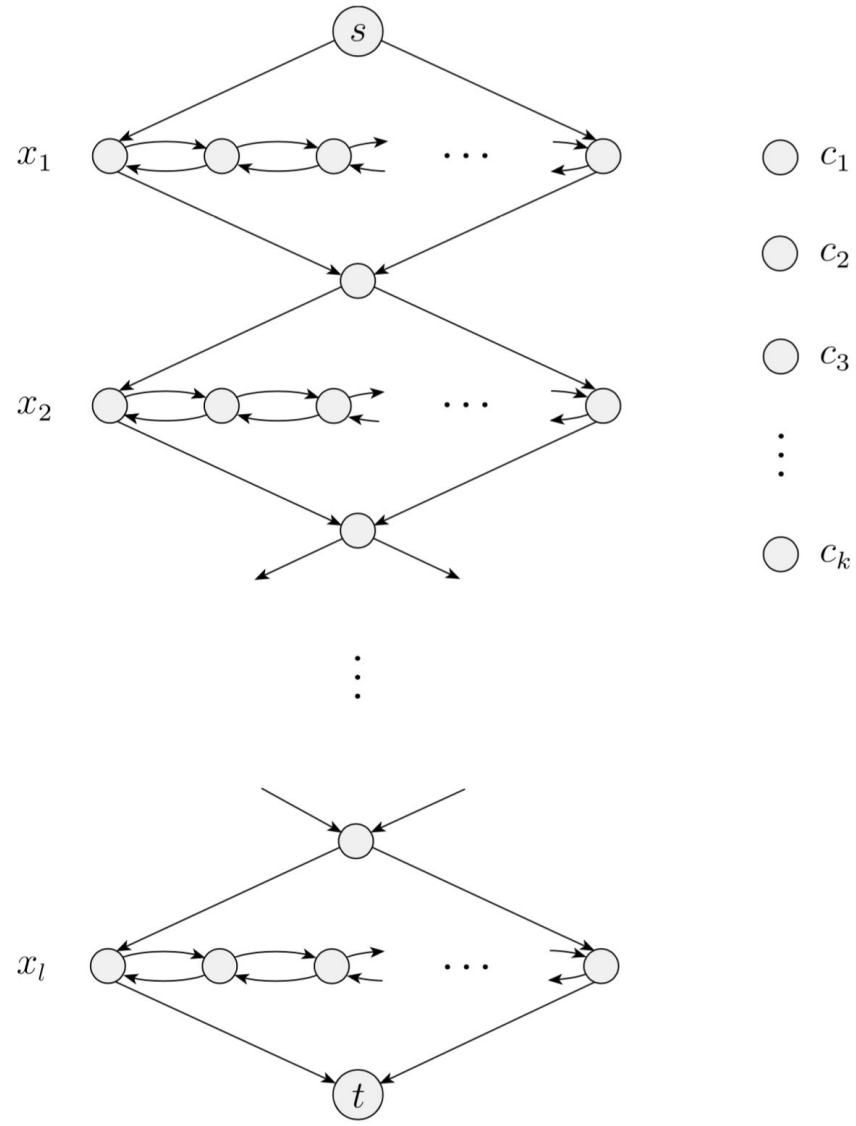

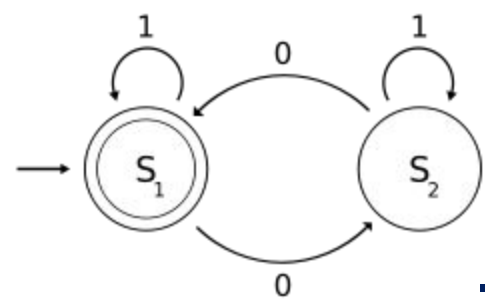



The Constraint Gadget when c_j Contains x_i

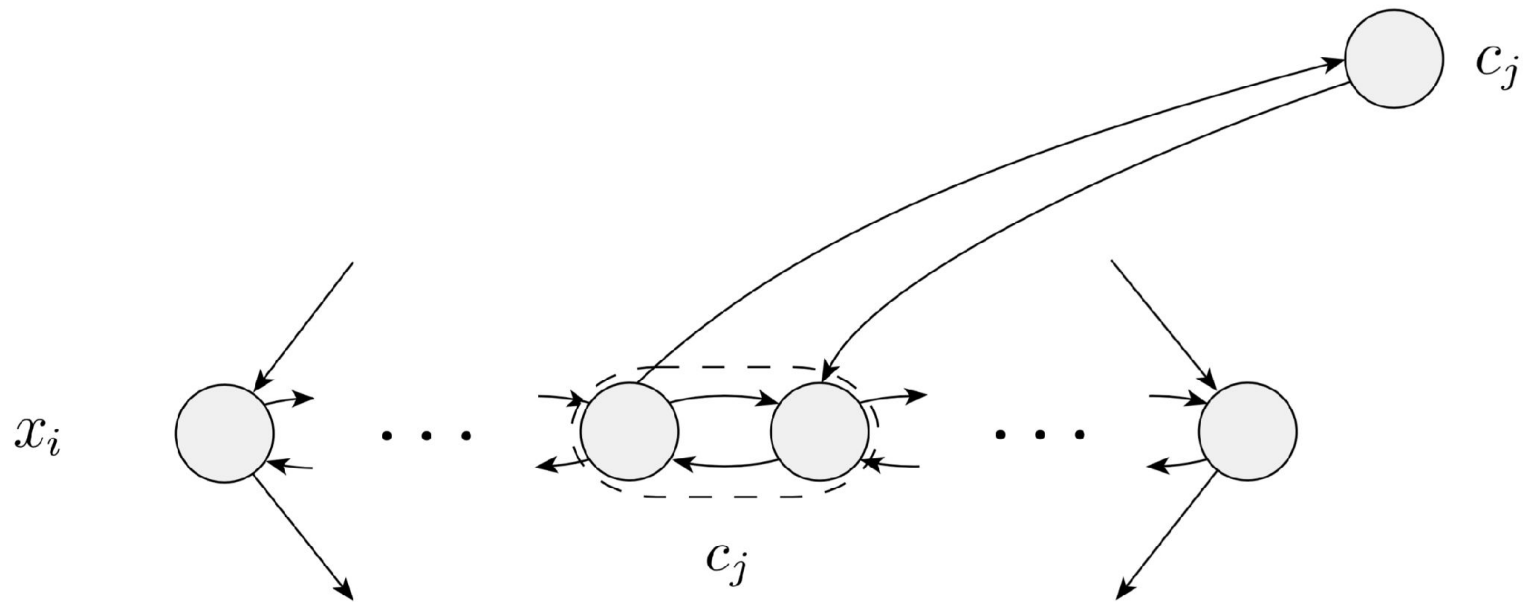

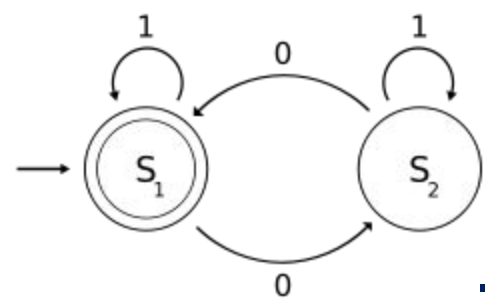



The Constraint Gadget when c_j Contains $\neg x_i$

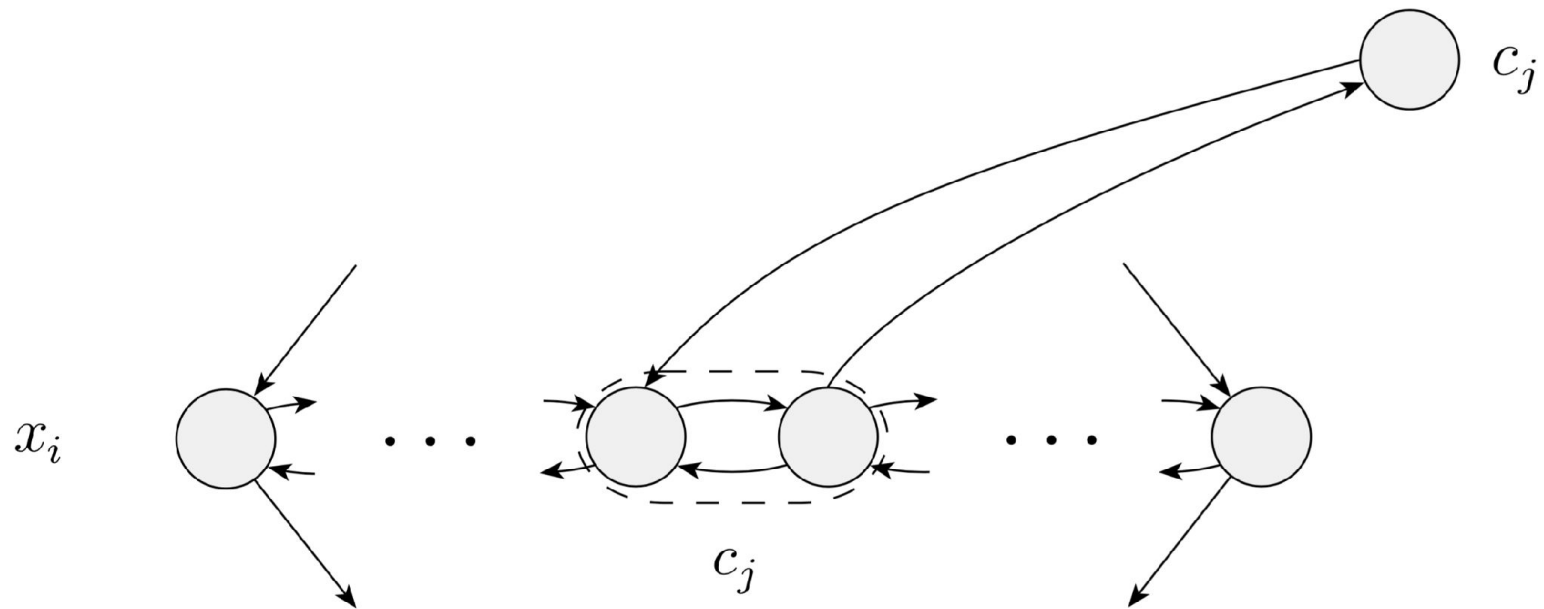

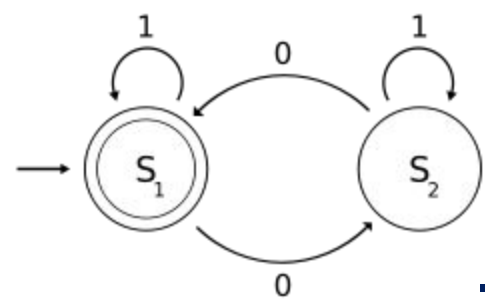

A Situation that Cannot Occur

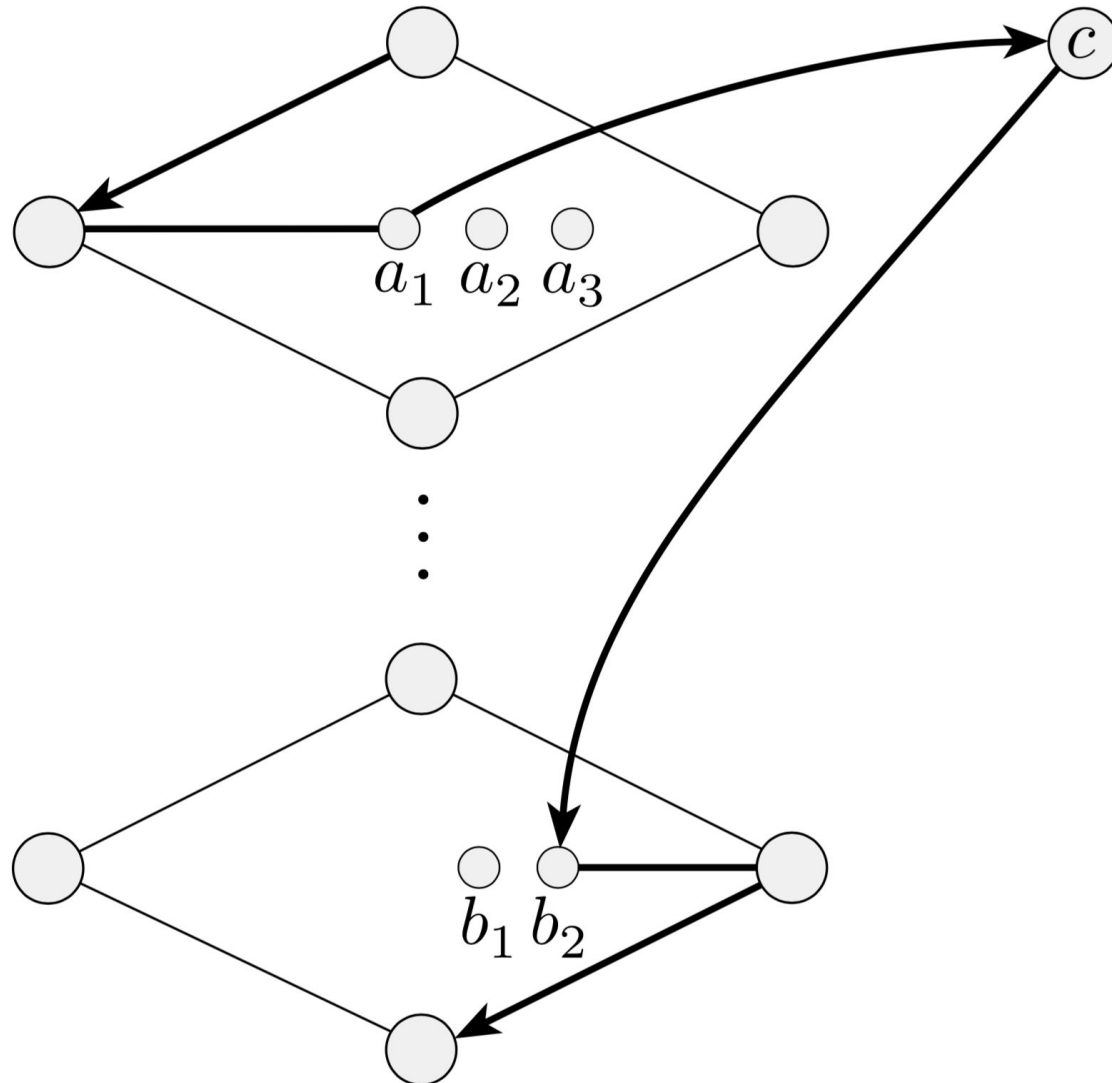


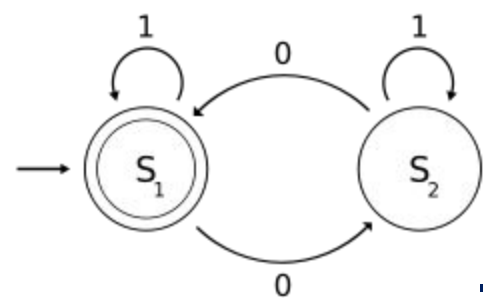


TSP is NP-Complete


Baltimore	0	345	514	355	522	189	97	230	39
Buffalo	345	0	430	186	252	445	365	217	384
Cincinnati	514	430	0	244	265	670	589	284	492
Cleveland	355	186	244	0	167	507	430	125	356
Detroit	522	252	265	167	0	674	597	292	523
New York	189	445	670	507	674	0	92	386	228
Philadelphia	97	365	589	430	597	92	0	305	136
Pittsburgh	230	217	284	125	292	386	305	0	231
Washington	39	384	492	356	523	228	136	231	0


TSP: Given n cities, $1, 2, \dots, n$, together with a nonnegative distance d_{ij} between any two cities, find the *shortest tour*.

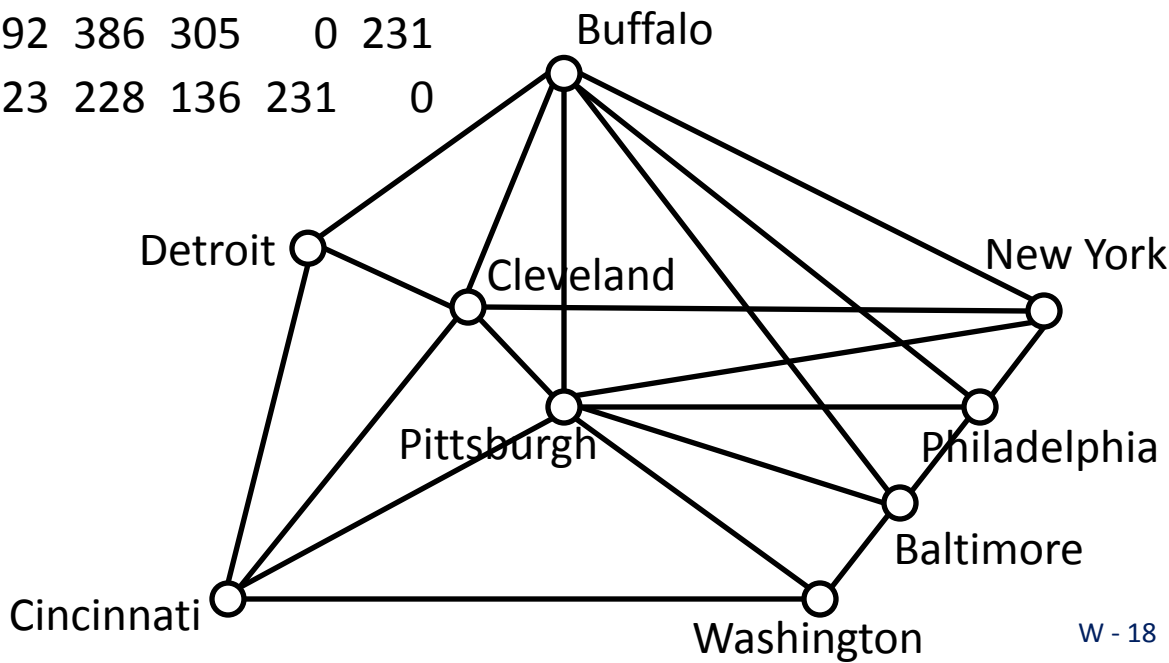

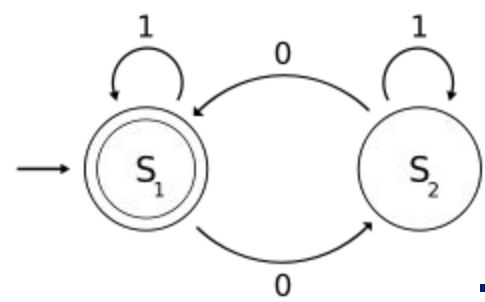

We Reduce *HAMPATH* to *TSP*

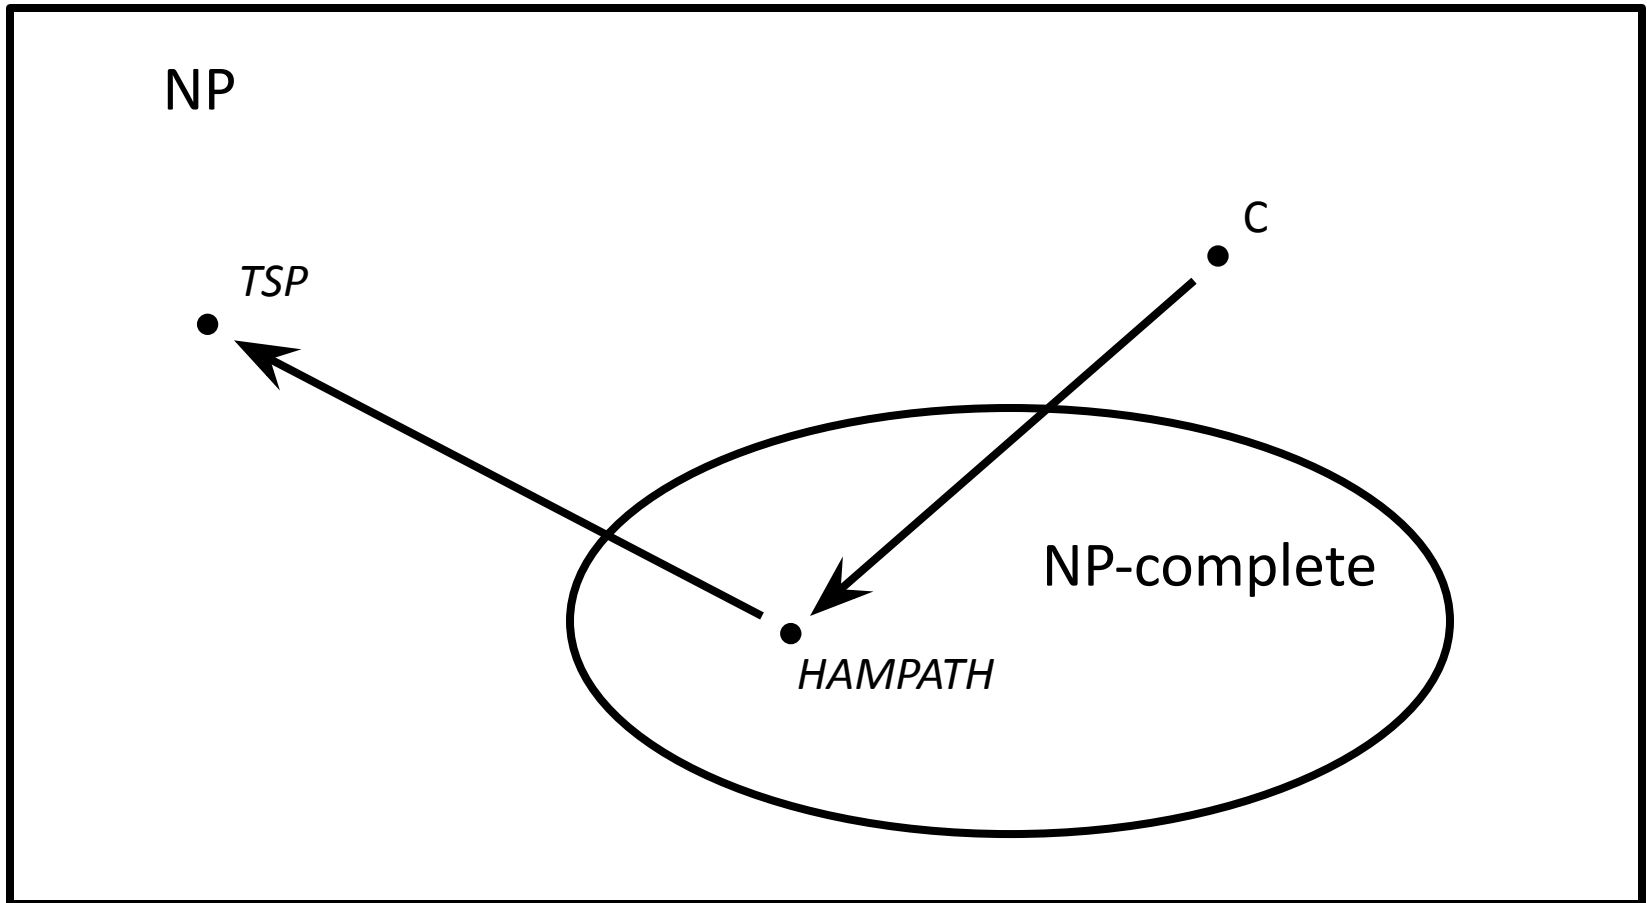


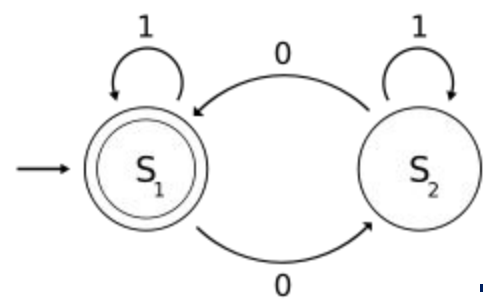

SUBSET-SUM is NP-Complete

SUBSET-SUM: Given a set of integers, does any subset sum to t ?

45 -18 4 16 -21 115
201 -8 -12 61 94
-64 -17 14
-190 -89 51 -79
77 23 -106
48 57 -35
141 -219 28 81

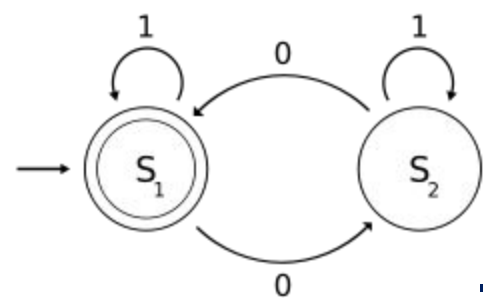

SUBSET-SUM is NP-Complete

We show $3SAT \leq_p SUBSET-SUM$
as in the following example.

Given

$(x_1 \vee \neg x_2 \vee x_3) \wedge$

$(x_2 \vee x_3 \vee \dots) \wedge$


$\dots \wedge$

$(\neg x_3 \vee \dots)$

we construct*:

	1	2	3	4	...	l	c_1	c_2	...	c_k
y_1	1	0	0	0	...	0	1	0	...	0
z_1	1	0	0	0	...	0	0	0	...	0
y_2		1	0	0	...	0	0	1	...	0
z_2		1	0	0	...	0	1	0	...	0
y_3			1	0	...	0	1	1	...	0
z_3			1	0	...	0	0	0	...	1
$\vdots$					$\ddots$	$\vdots$	$\vdots$		$\vdots$	$\vdots$
y_l						1	0	0	...	0
z_l						1	0	0	...	0
g_1							1	0	...	0
h_1							1	0	...	0
g_2								1	...	0
h_2								1	...	0
$\vdots$									$\ddots$	$\vdots$
g_k										1
h_k										1
t	1	1	1	1	...	1	3	3	...	3


*these are all decimal numbers

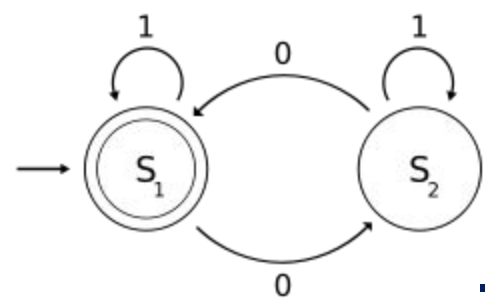


VERTEX-COVER is NP-Complete

If G is an undirected graph, a **vertex cover** of G is a subset of the nodes where every edge of G touches one of those nodes.

Theorem. *VERTEX-COVER* is NP-Complete.

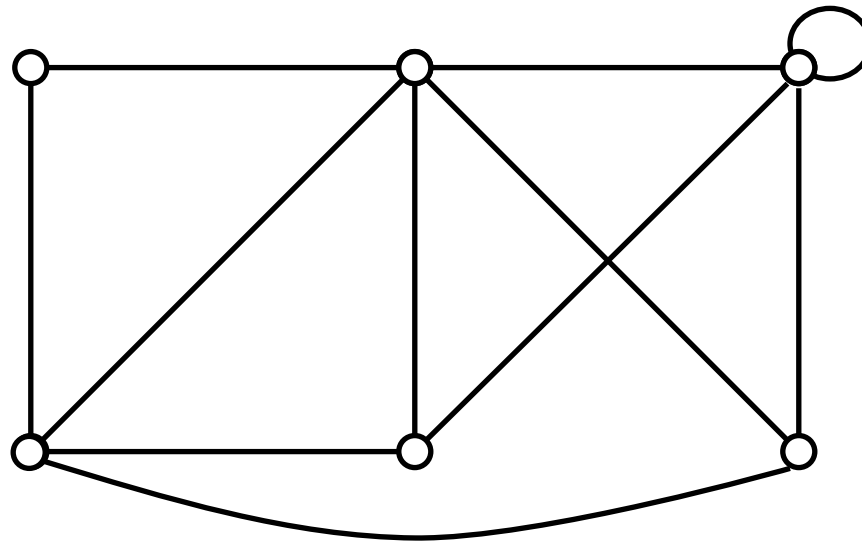

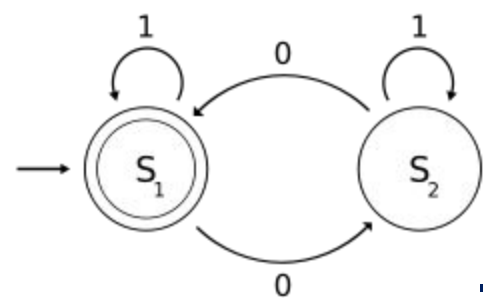

SET-COVER is NP-Complete

Given a set S and a collection of subsets from S , do any k of the subsets unioned together equal S ?

$S = \{\text{red, blue, yellow, green, purple, brown, silver, black, gold, white, orange, pink}\}$

Subsets:

$\{\text{red, blue, silver, pink}\}$

$\{\text{yellow, gold, white, orange}\}$


$\{\text{green, silver, gold, white}\}$

$\{\text{red, green, black, orange}\}$

$\{\text{green, purple, brown, black}\}$

$\{\text{brown, black, white, pink}\}$

Theorem. *SET-COVER* is NP-Complete.

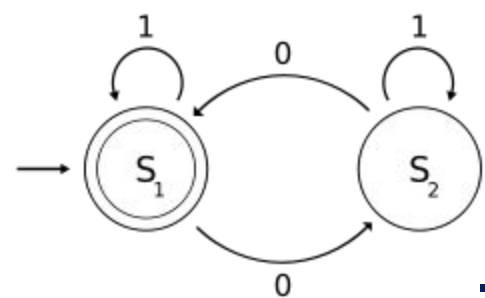

SET-COVER is NP-Complete

Theorem. *SET-COVER* is NP-Complete.

$S = \{A, B, C, D, E, F, G, H, I, J, K\}$

Subsets:

$\{A, D\}$

$\{B, C, F, H\}$

$\{E, H, J\}$

$\{A, B, E, G, I\}$

$\{F, I, K\}$

$\{D, G, J, K\}$

